



Road Markers

MSL-SV-RM02- Specifications



About Us,

MSL USA's LED streetlights are trusted by electrical contractors, government agencies, and project managers across the United States. Our selection of streetlights include fixtures with dusk to dawn photocell technology as well as weather resistant coating to ensure smooth operation through harsh weather conditions. We also offer solar powered streetlights for environmentally friendly projects. We advanced production technology, we deliver smart lighting solutions for streets, gardens, residential areas, and many more...

MSL-SV-RM02



MSL-SV-RM02 is Decorative LED surface markers, also known as surface-mounted LED path lights or deck lights, are versatile lighting options used to outline and accent outdoor areas like driveways, decks, patios, walkways, and gardens. They come in various styles and can be either solar-powered or low-voltage (wired).

decorative road markers are non-regulatory aesthetic enhancements that use various durable materials to add color and patterns to pavement, brightening public spaces.




Technical Specifications

Model	MSL-SV-RM02-A	MSL-SV-RM02-B	MSL-SV-RM02-C
Voltage	DC12V-24V		
Rated Output Power	0.6W	0.6W	0.4W (Single-color) / 0.9W (Multi-color)
Lumen Output	9Lm	9Lm	4.5Lm
Beam Angle	120°	120°	120°
LED	8 pcs SMD3350 LED	8 pcs SMD3350 LED	12 pcs SMD3350 LED
LED Color	Cool White, Warm White, White, Red, Yellow, Green, Blue, RGB		
IP Rating	IP54	IP67	IP67
Warranty	3 Years Limited		
Cover	High-intensity tempered glass		
Surface Material	High Grade 304/316 Stainless Steel		
Attached Parts	DC12V Constant voltage driver power supply		
	With 1*1m 22AWG 2468 PVC cable attached AMP plug	With 1*1m 22AWG 2468 PVC cable attached by male connector	
	Two wire smart controller/ dimmer/ T shape power cord with connectable waterproof plug	Four-wire Three-loop circuit RGB controller + remote controller/ multifunctional RGB controller	


Product Features

- Adopt SMD LED technology.
- Ultra thin design, low built-in depth 9MM/0.35" only.
- With easy & convenient installation.
- Walkover pressure max. 100kg/220lbs
- Long lifespan over 50,000 hours.

Dimensions

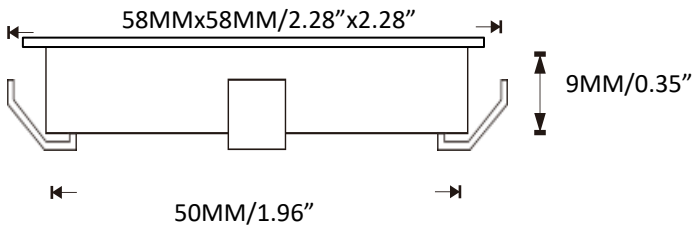

Installation

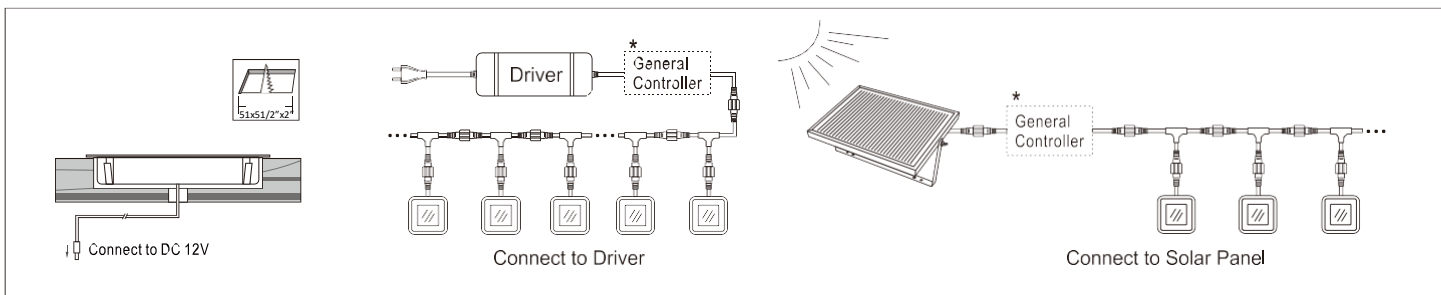



Uses and Applications Guide

USES AND APPLICATIONS GUIDE

Walk/Bike Path

Parks

Gardens

Hotel Entrances

Crosswalks

Ordering Guide

Model	Voltage	LED Wattage	LED Color	LED body color	IP Rating Options
MSL-SV-RM02-A MSL-SV-RM02-B MSL-SV-RM02-C	DC12V	0.6W *0.4W/0.9W *(Available for type C)	CW- Cool White WW- Warm White W-White R- Red Y- Yellow G- Green B- Blue RGB	SLV- Silver	IP-54 IP-67