

Road Markers MSL-SV-RM03- Specifications





About Us,

MSL USA's LED streetlights are trusted by electrical contractors, government agencies, and project managers across the United States. Our selection of streetlights include fixtures with dusk to dawn photocell technology as well as weather resistant coating to ensure smooth operation through harsh weather conditions. We also offer solar powered streetlights for environmentally friendly projects. We advanced production technology, we deliver smart lighting solutions for streets, gardens, residential areas, and many more...



MSL-SV-RM03





MSL-SV-RM03 is Decorative LED surface markers, also known as surface-mounted LED path lights or deck lights, are versatile lighting options used to outline and accent outdoor areas like driveways, decks, patios, walkways, and gardens. They come in various styles and can be either solar-powered or low-voltage (wired).

decorative road markers are non-regulatory aesthetic enhancements that use various durable materials to add color and patterns to pavement, brightening public spaces.



Technical Specifications


| Model | MSL-SV-RM03-A | MSL-SV-RM03-B | MSL-SV-RM03-C | | |
|--------------------|--|---|---|--|--|
| Voltage | DC12V | DC12V | DC12V | | |
| Rated Output Power | 0.4W 1W | | 0.2W (Single-color) / 0.4W (Multi-color) | | |
| Lumen Output | 10Lm | 60Lm | 4Lm | | |
| Beam Angle | 120 [°] | 120° | 120° | | |
| LED | 1 pc SMD3350 LED | 6 pcs SMD3350 LED | 1 pc SMD3350 LED | | |
| LED Color | Cool White, Warm White, White, Red, Yellow, Green, Blue, RGB | | | | |
| IP Rating | IP67 | IP67 | IP67 | | |
| Warranty | 3 Years Limited | | | | |
| Cover | High-intensity tempered glass | | | | |
| Surface Material | High Grade 304/316 Stainless Steel | | | | |
| Attached Parts | DC12V Constant voltage driver power supply | | | | |
| | With 1*1m 22AWG 2468 PVC cable attached AMP plug | With 1*1m 22AWG 2468 PVC cable attached by male connector | | | |
| | Two wire smart controller/ dimme connectable waterproof plug | er/T shape power cord with | Four-wire Three-loop circuit RGB controller + remote controller/ multifunctional RGB controller | | |



Product Features


- Adopt SMD LED technology.
- Hardware & plastic integrated design.
- With easy & convenient installation.
- Walkover pressure max. 100kg/220lbs
- Long lifespan over 50,000 hours.

Dimensions





Installation

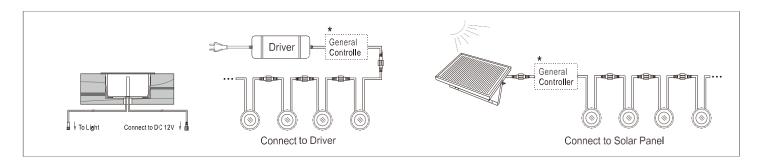



Uses and Applications Guide

USES AND APPLICATIONS GUIDE

| Walk/Bike Path | |
|-----------------|--|
| Parks | |
| Gardens | |
| Hotel Entrances | |
| Crosswalks | |

Ordering Guide

| Model | Voltage | LED Wattage | LED Color | LED body color | IP Rating Options |
|---------------|---------|---|----------------|----------------|-------------------|
| MSL-SV-RM03-A | DC12V | 0.7W 1W *0.2W/0.4W *(Available for type C) | CW- Cool White | SLV- Silver | IP-67 |
| MSL-SV-RM03-B | | | WW- Warm White | | |
| MSL-SV-RM03-C | | | W-White | - | |
| | | | R- Red | | |
| | | | Y- Yellow | | |
| | | | G- Green | | |
| | | B- Blue | | | |
| | | | RGB | | |